

```

6) listaTelefonique InsertInQueue (char * num, char * t, listitel ... l)
{
    listaTelefonica p = l; pPre = NULL;
    // (crearea la un nou nod)
    listaTelefonica pNext = (listaTelefonica) malloc(sizeof(Node));


```

```

strcpy(pNext->num, num);
strcpy(pNext->telephone, t);
pNext->pNext = NULL;
while (p) {
    pPre = p;
    p = p->pNext;
}
pPre->pNext = pNext;
return l;

```

if (l == NULL)
return pNext;

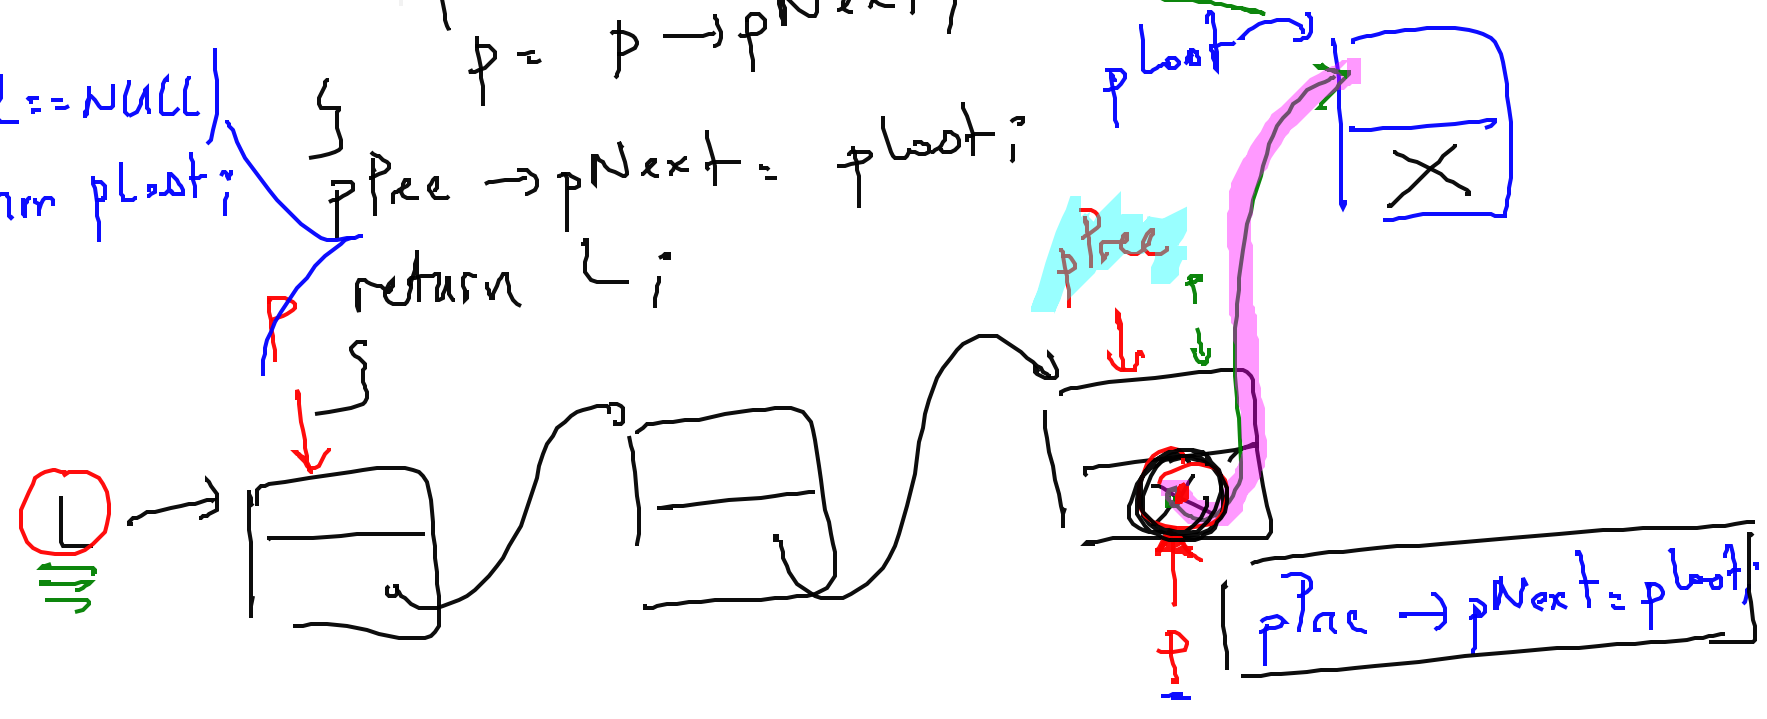

```

while (p->pNext) {
    p = p->pNext;
}
p->pNext = pNext;
return l;

```