
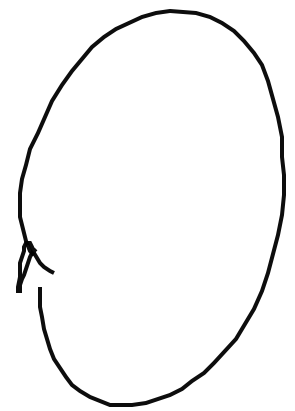
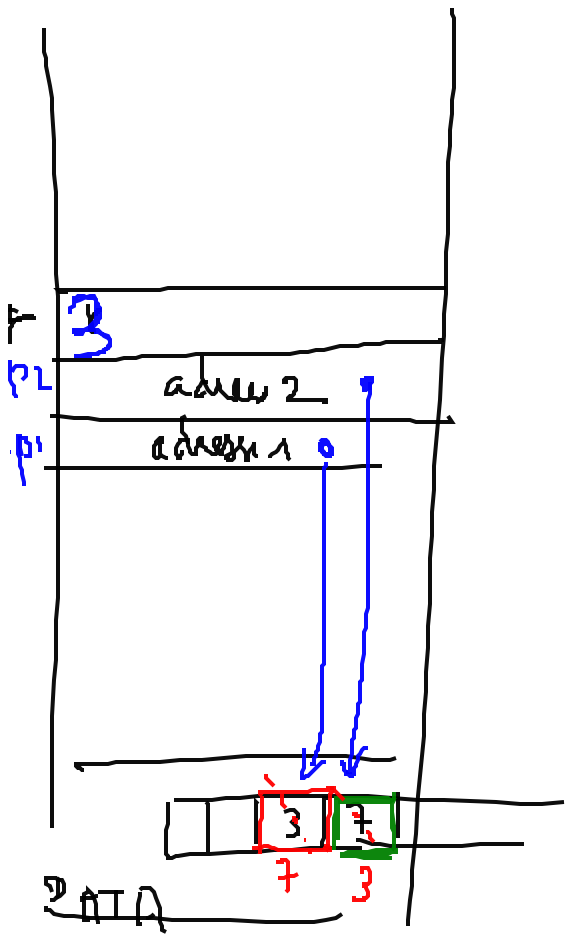


↳ LoB

int t [100];

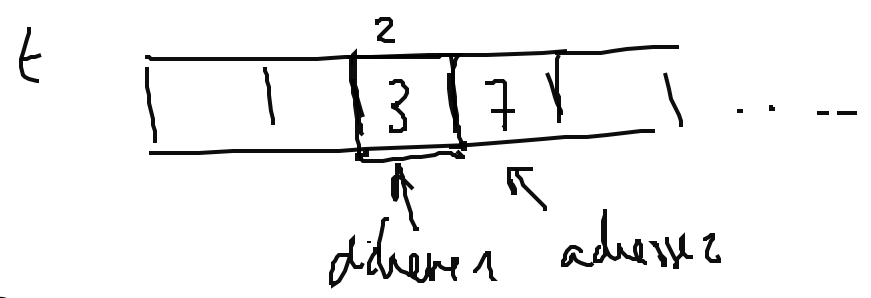

swaps (&t[i], &t[i+1]);

Labels: $address1$ under $\&t[i]$, $address2$ under $\&t[i+1]$.

type address de int

Void Swap (int * p1, int * p2) {

int r;
r = *p1;
*p1 = *p2 ;
*p2 = r ;

}